


NBAA Noise Abatement Departure Procedure With High-Density Airport Option

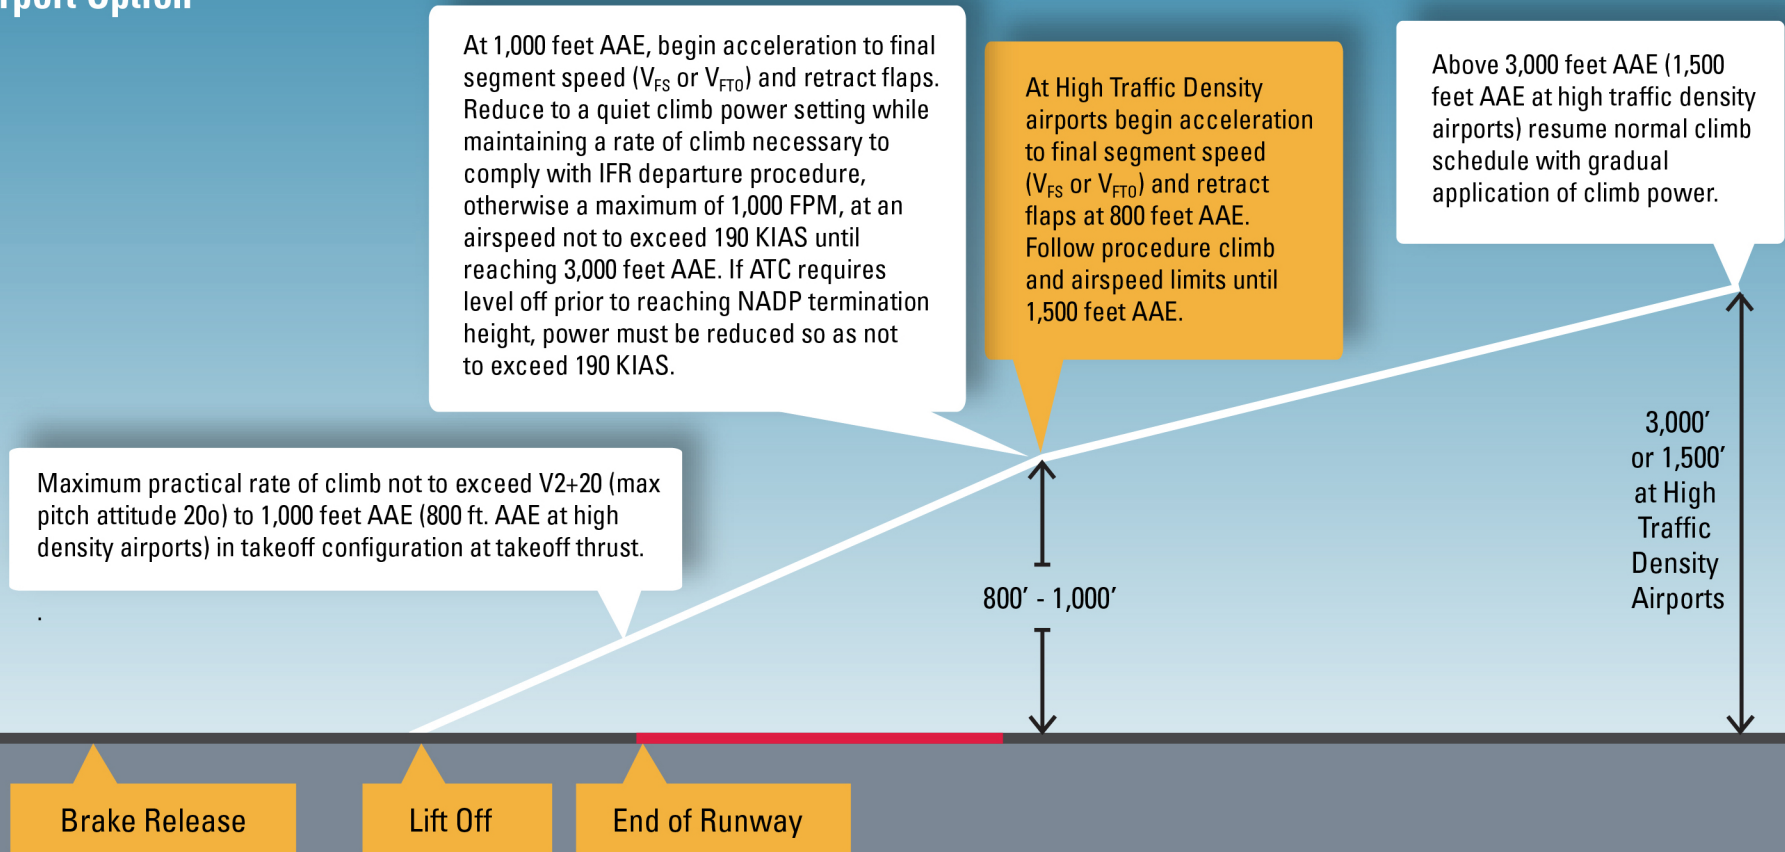

Notes: No configuration changes below 400 ft. (except landing gear retraction). Ensure compliance with applicable IFR climb and airspeed requirements. **For a takeoff with an initial assigned altitudes within 1,500' of the airport elevation (AAE), pilots may elect to climb at V_2+20 in the takeoff configuration until necessary for level-off at the assigned altitude.** This recommended procedure is not intended to preempt the responsibilities of the pilot-in command for safe aircraft operation. Ensure compliance with applicable IFR climb and airspeed requirements and ATC instructions.